


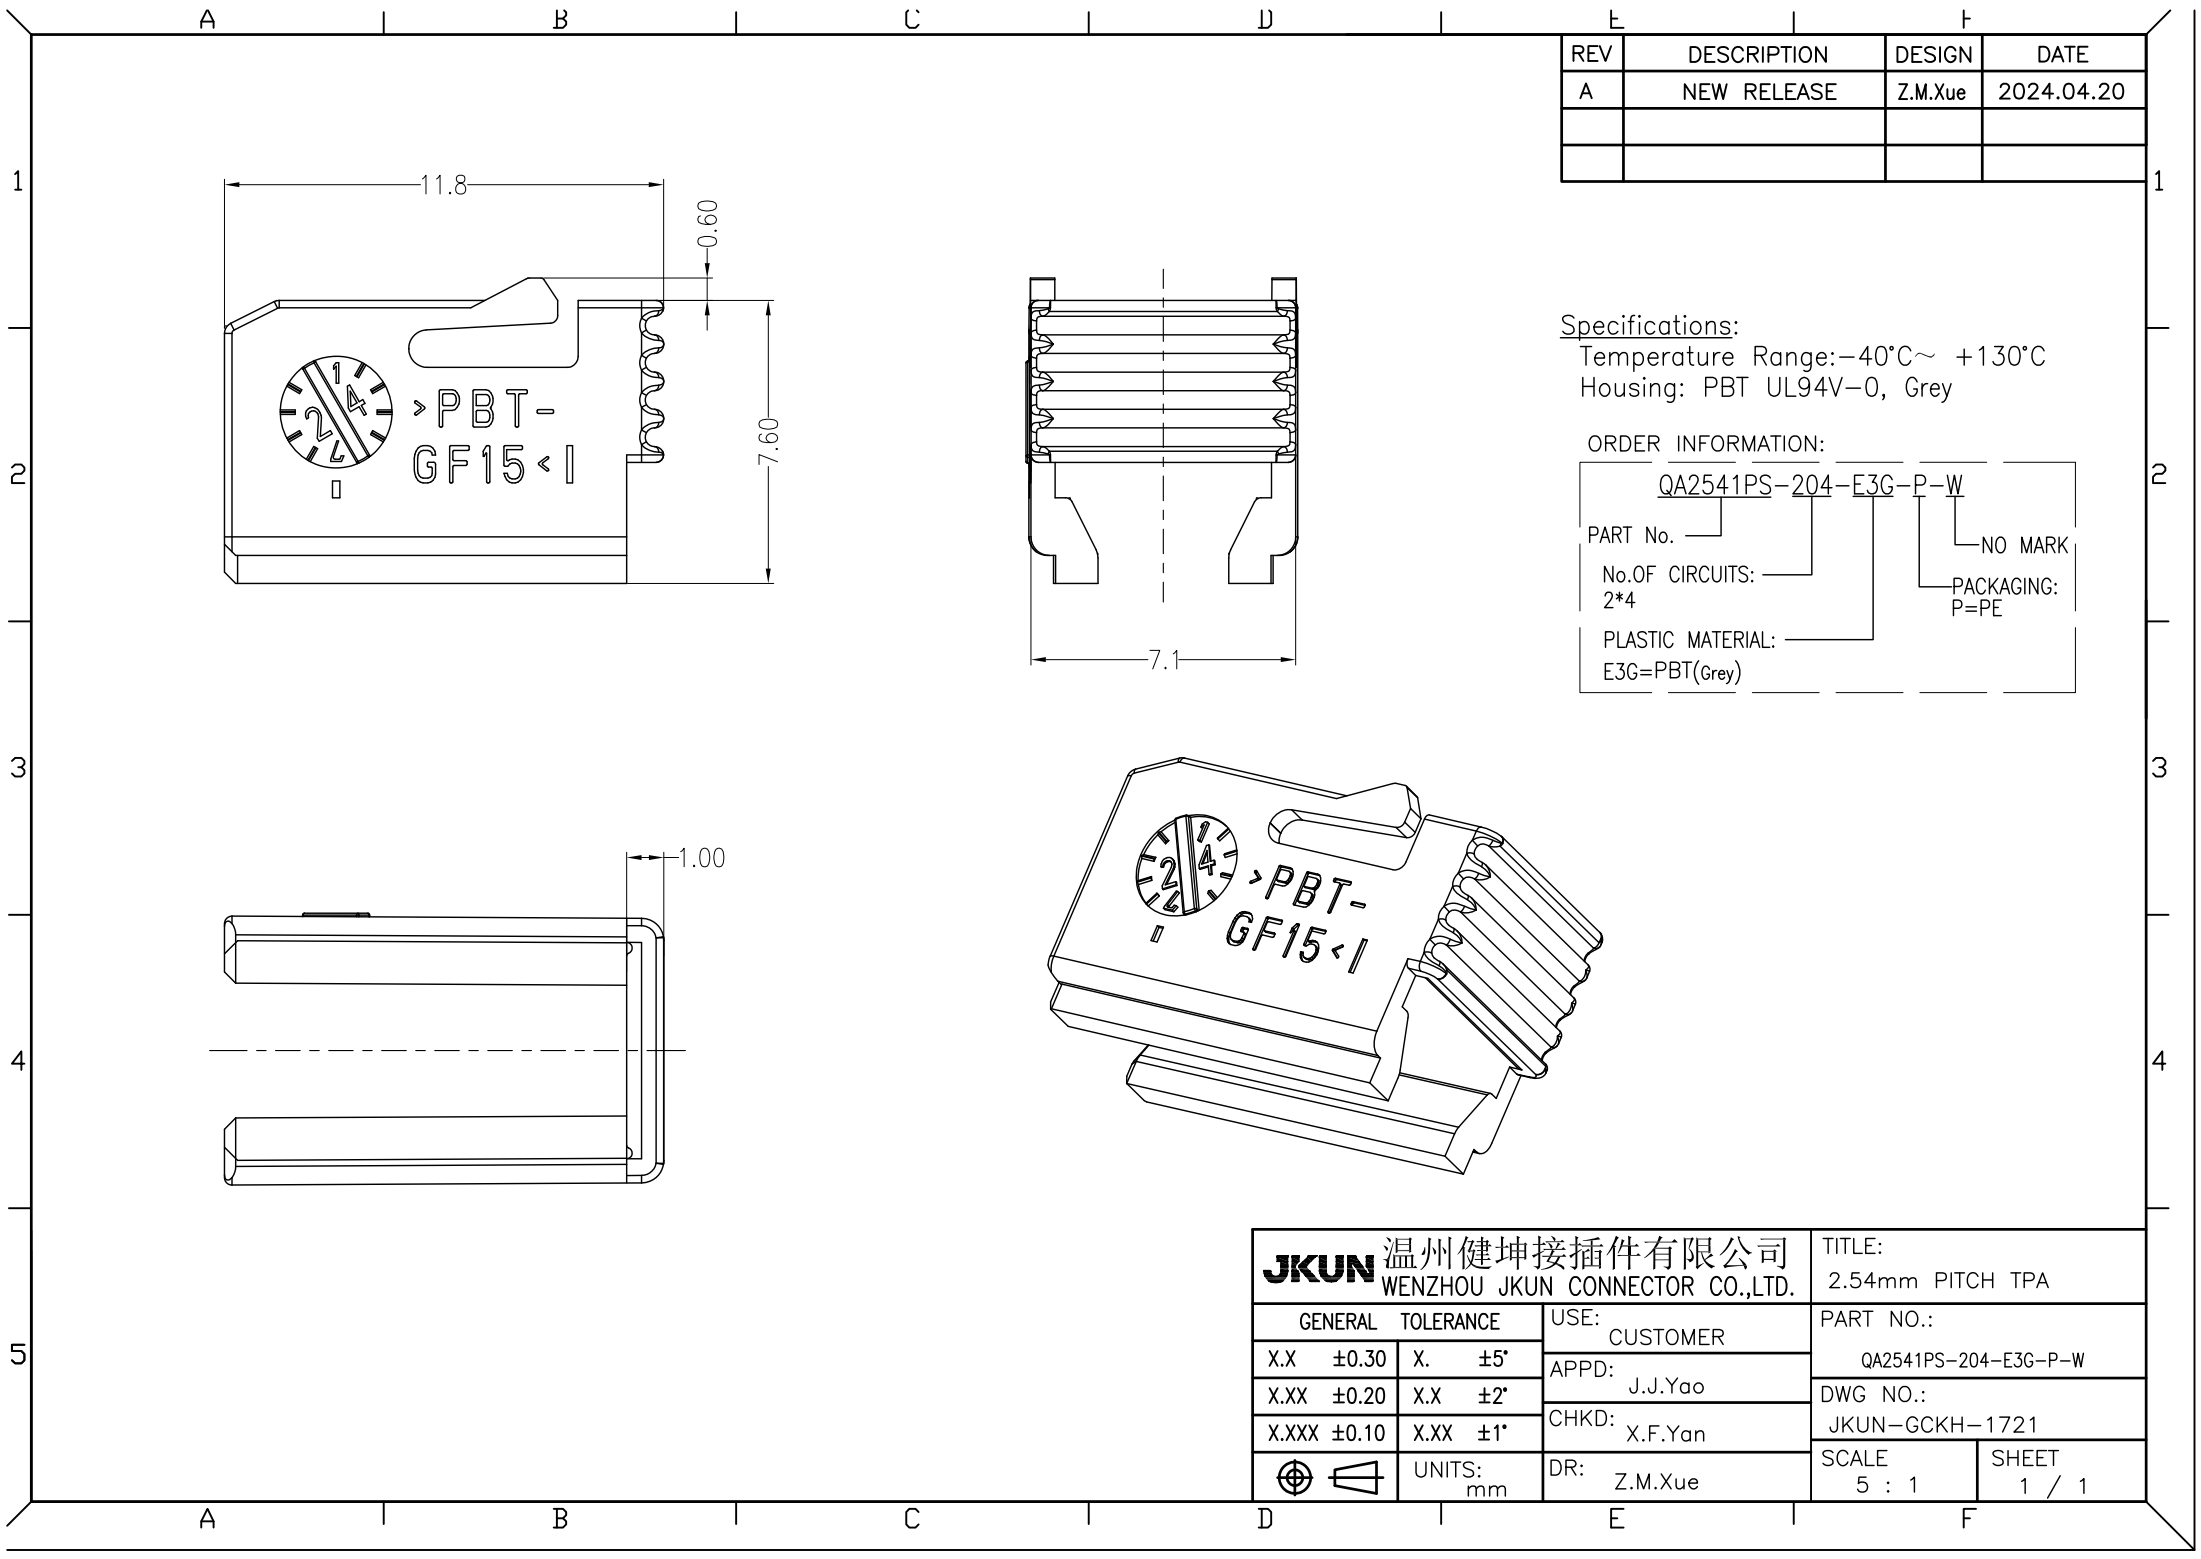


REV	DESCRIPTION	DESIGN	DATE
A	NEW RELEASE	Z.M.Xue	2024.04.20

Specifications:
Temperature Range:-40°C~ +130°C
Housing: PBT UL94V-0, Grey

ORDER INFORMATION:			
QA2541PS-204-E3G-P-W			
PART No.		NO MARK	
No.OF CIRCUITS:	2*4	PACKAGING: P=PE	
PLASTIC MATERIAL:	E3G=PBT(Grey)		


JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.			TITLE: 2.54mm PITCH TPA	
			PART NO.: QA2541PS-204-E3G-P-W	
GENERAL TOLERANCE		USE:	CUSTOMER	
X.X ±0.30	X. ±5°	APPD:	J.J.Yao	
X.XX ±0.20	X.X ±2°	CHKD:	X.F.Yan	
X.XXX ±0.10	X.XX ±1°	DR:	Z.M.Xue	
		UNITS:	mm	
			SCALE	SHEET
			5 : 1	1 / 1

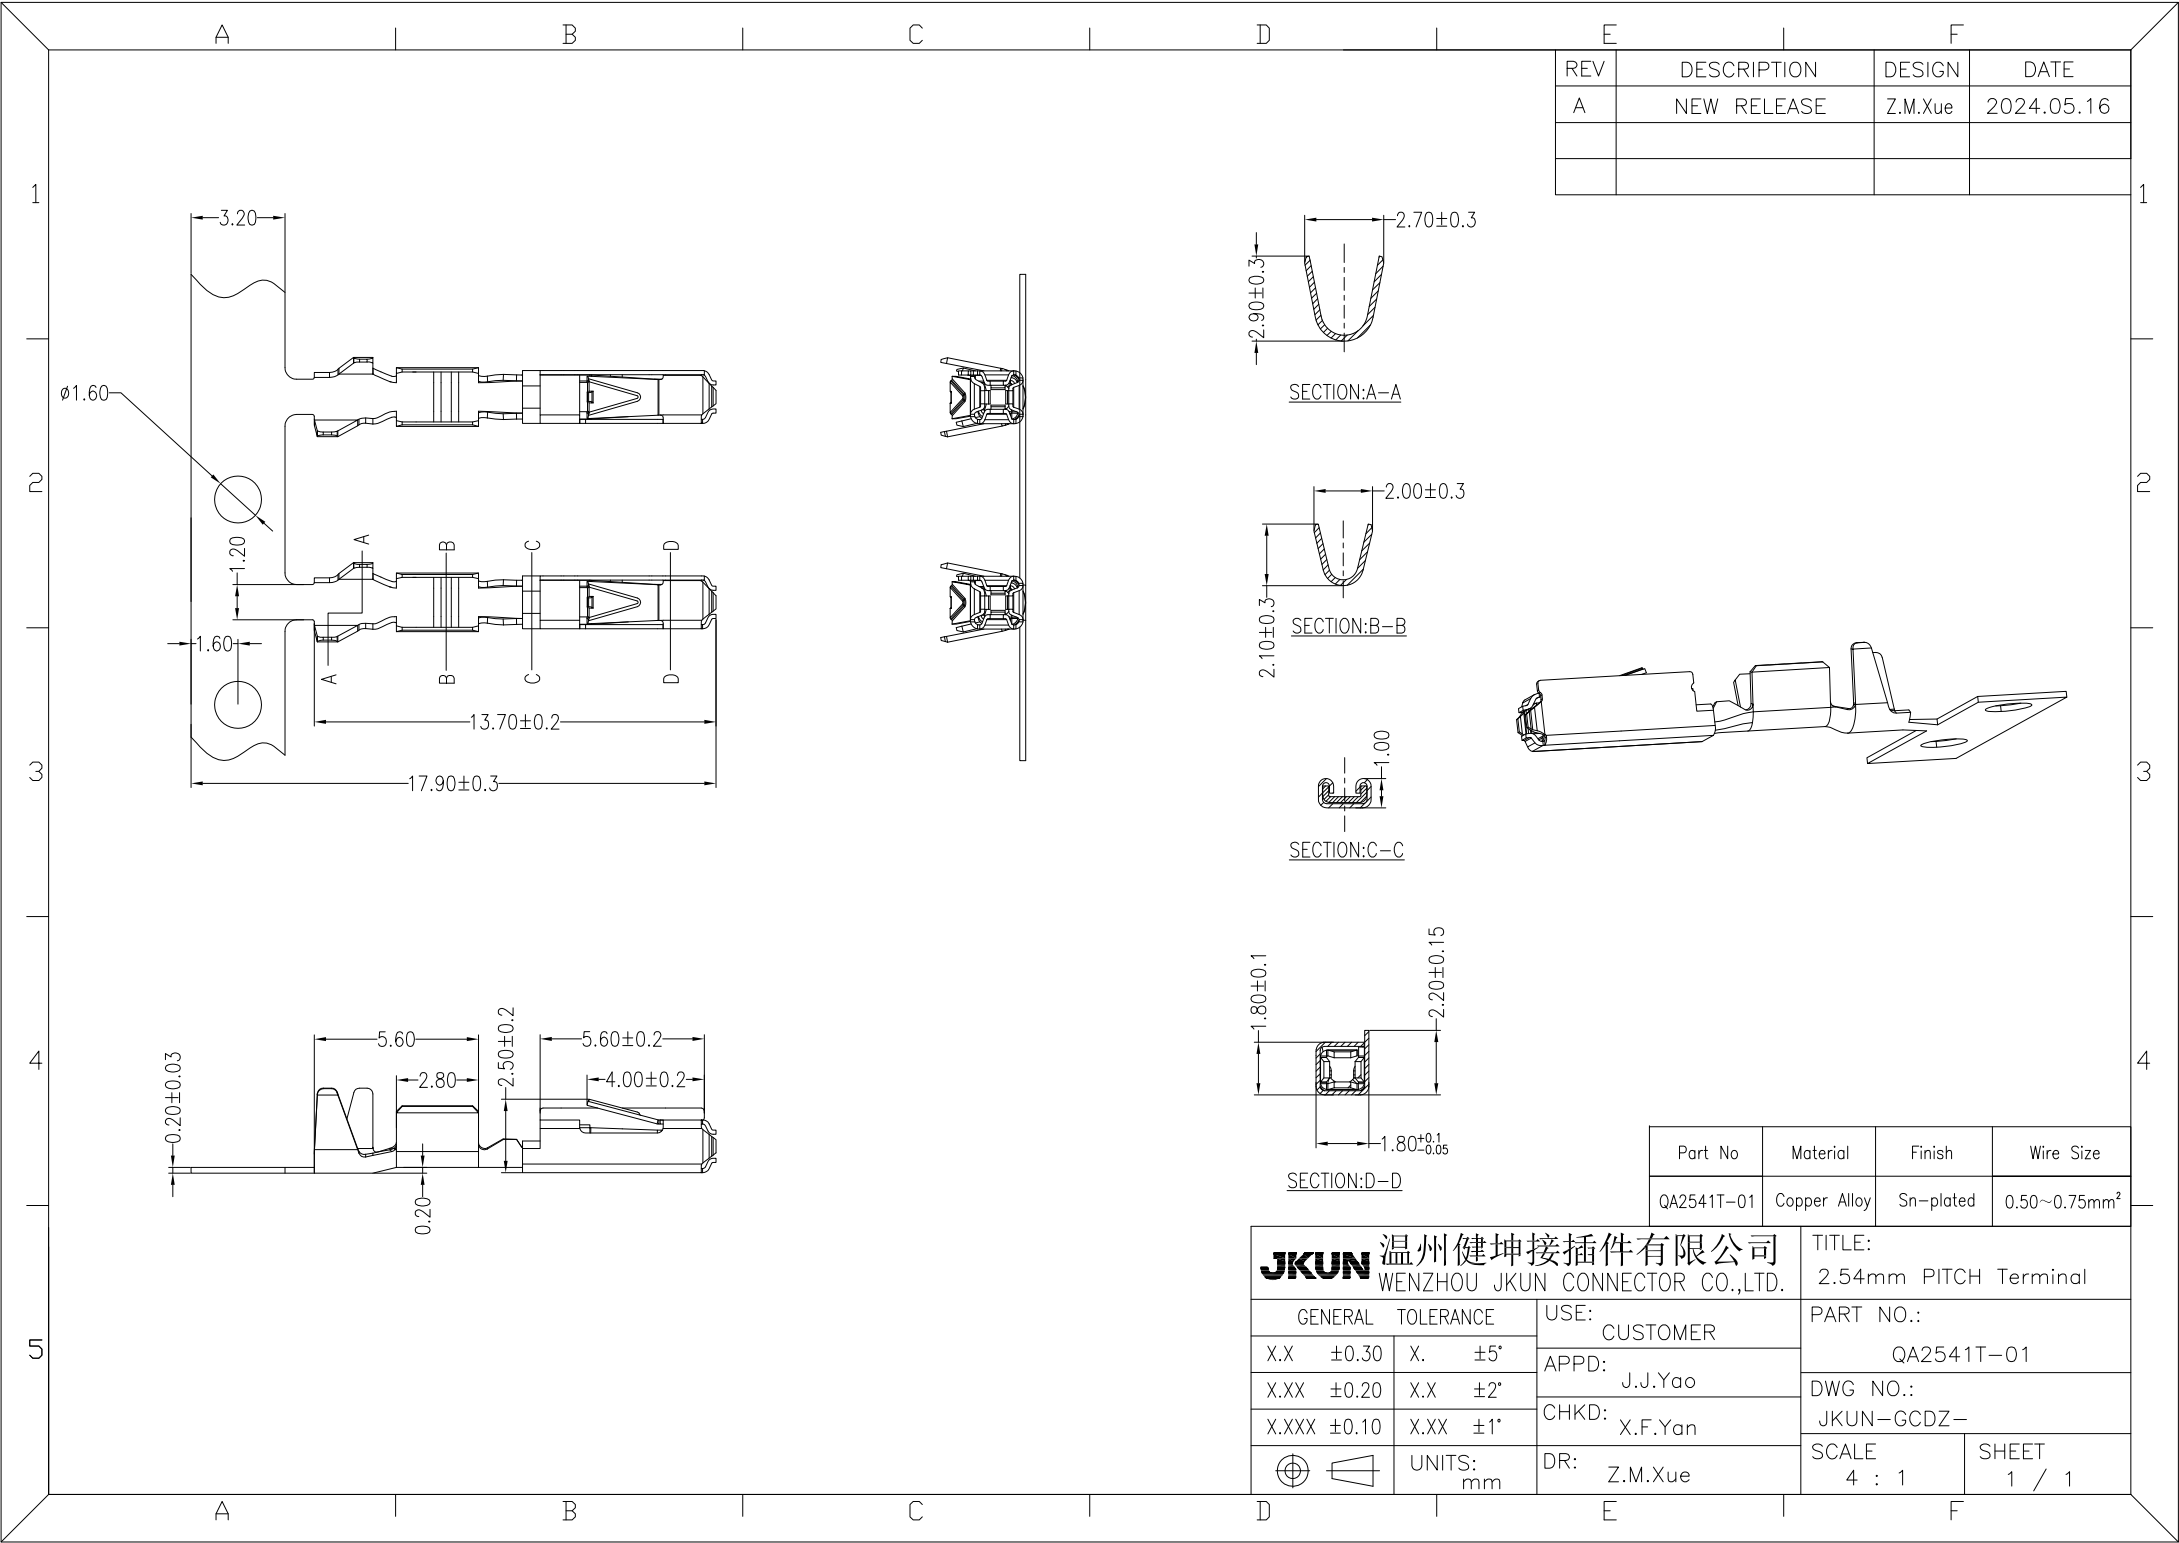

REV	DESCRIPTION	DESIGN	DATE
A	NEW RELEASE	Z.M.Xue	2024.05.16

Part No	Material	Finish	Wire Size
QA2541T-01	Copper Alloy	Sn-plated	0.50~0.75mm ²

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.			TITLE: 2.54mm PITCH Terminal	
			PART NO.: QA2541T-01	
GENERAL TOLERANCE		USE:	DWG NO.: JKUN-GCDZ-	
X.X ±0.30	X. ±5°	CUSTOMER		
X.XX ±0.20	X.X ±2°	APPD: J.J.Yao	SCALE 4 : 1	
X.XXX ±0.10	X.XX ±1°	CHKD: X.F.Yan		
 	UNITS: mm	DR: Z.M.Xue	SHEET 1 / 1	

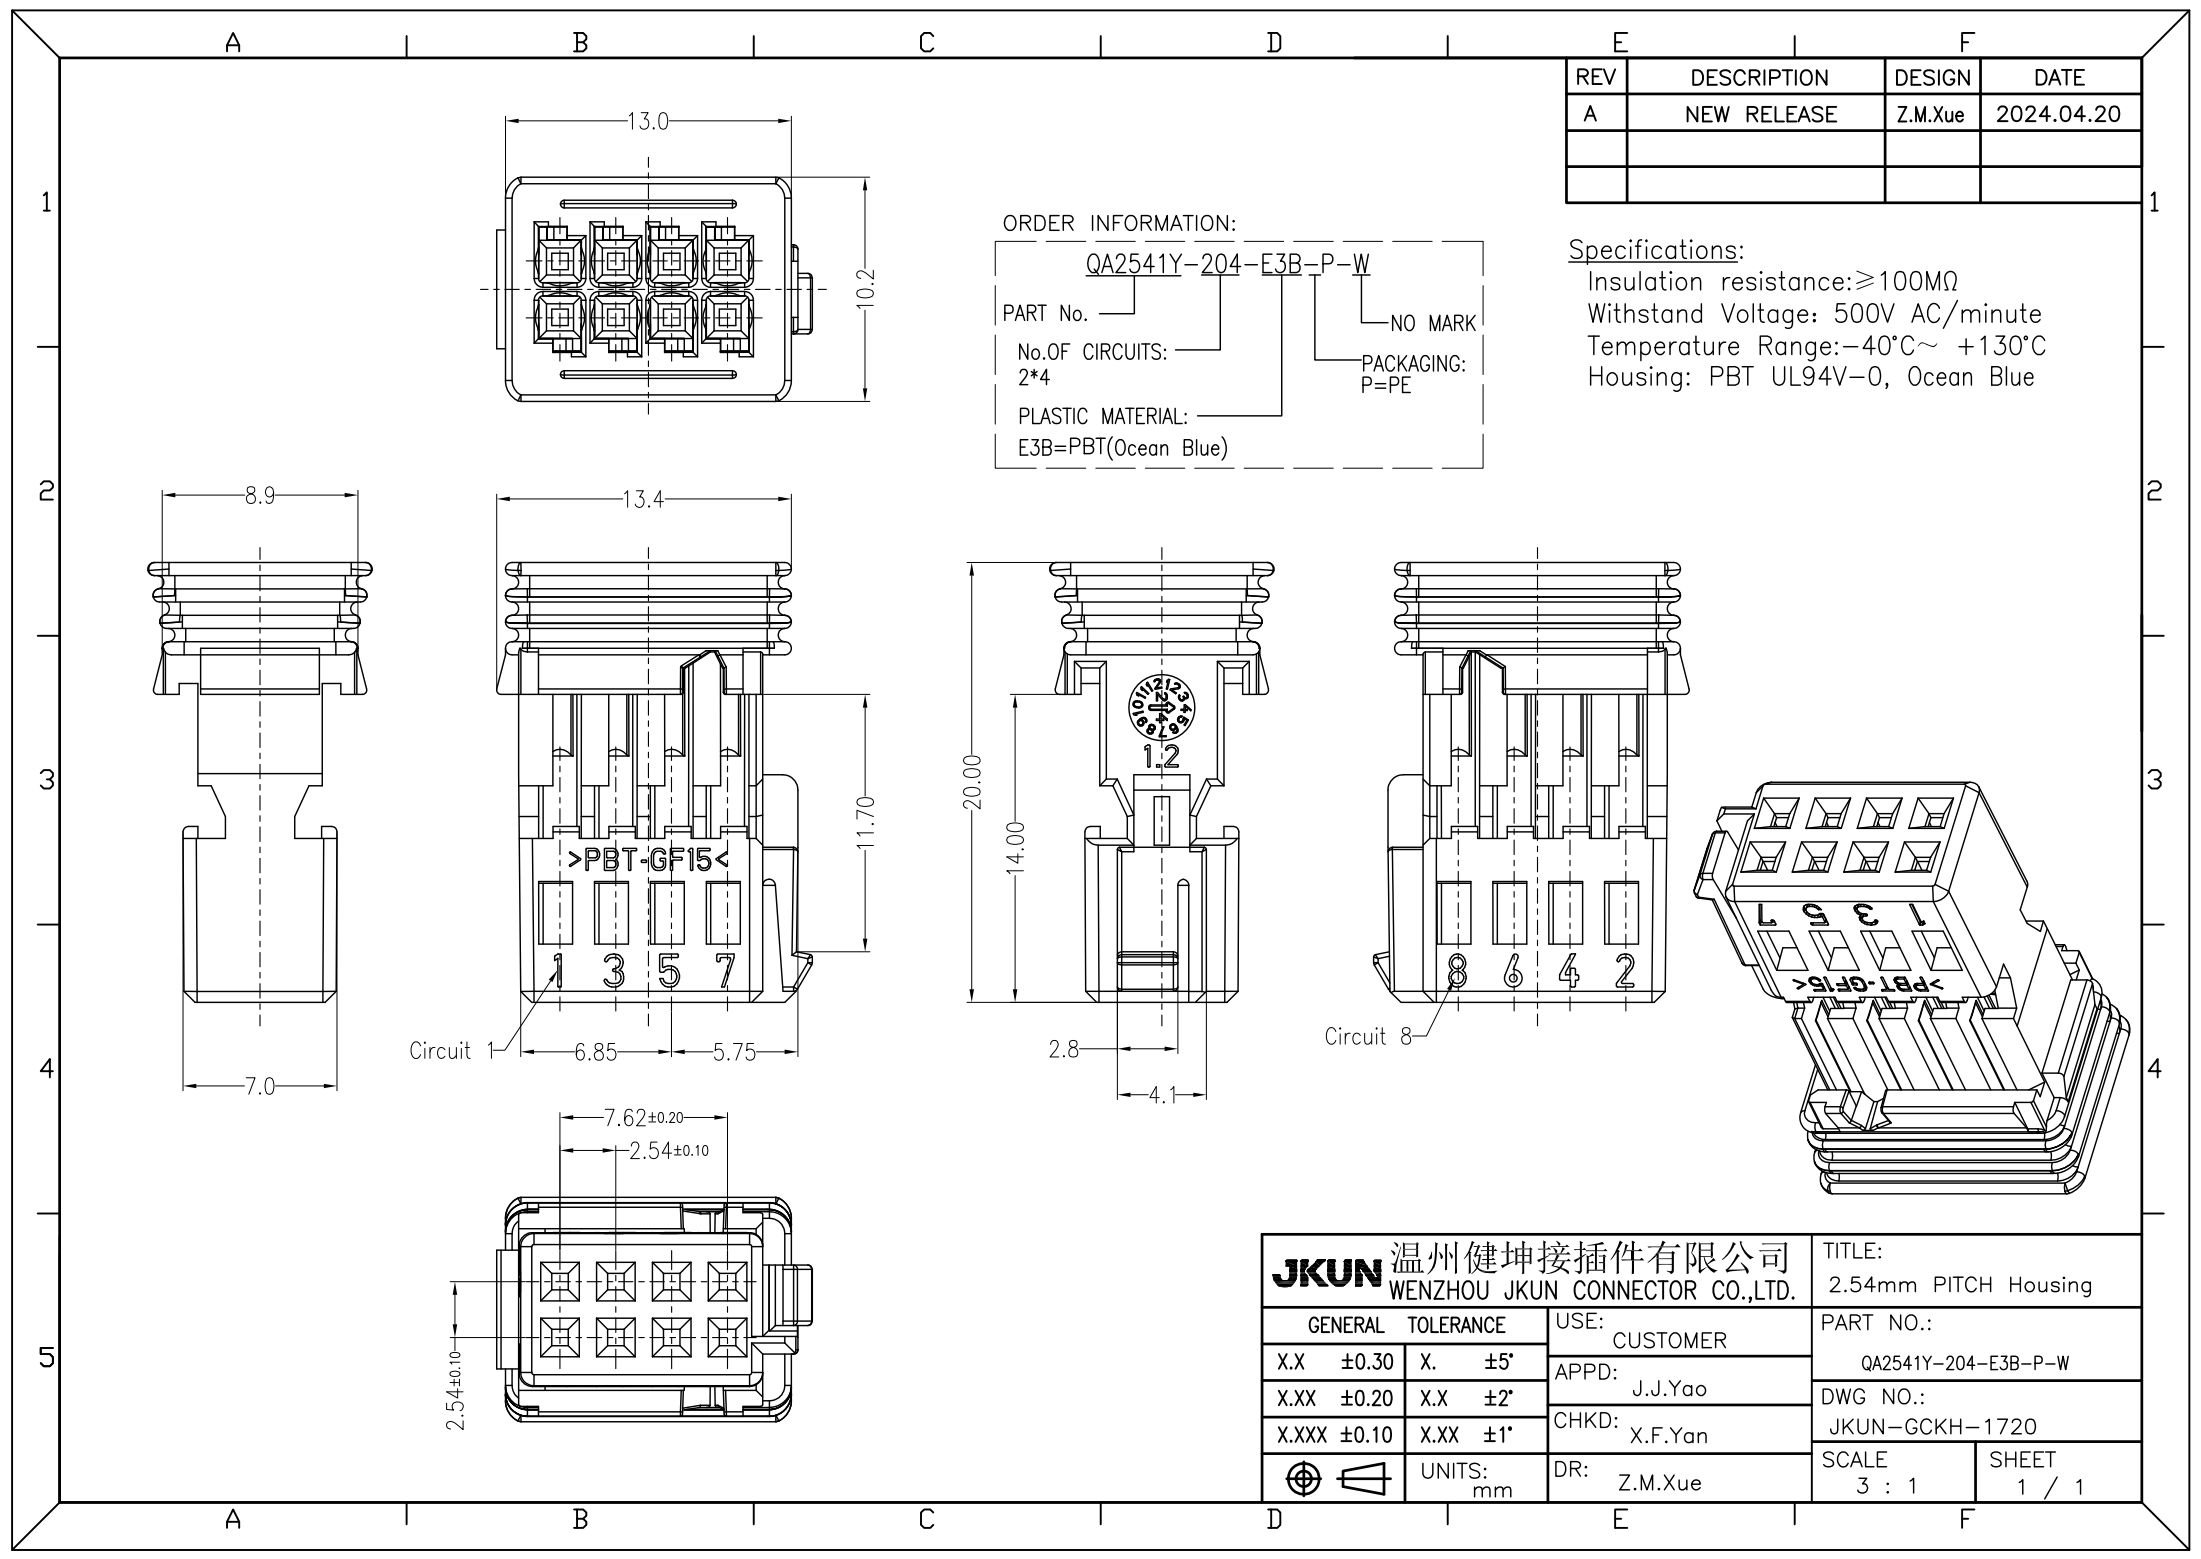

REV	DESCRIPTION	DESIGN	DATE
A	NEW RELEASE	Z.M.Xue	2024.04.20

ORDER INFORMATION:

QA2541Y-204-E3B-P-W			
PART No.		NO MARK	
No.OF CIRCUITS:		PACKAGING:	
2*4		P=PE	
PLASTIC MATERIAL:			
E3B=PBT(Ocean Blue)			

Specifications:

Insulation resistance:≥100MΩ
Withstand Voltage: 500V AC/minute
Temperature Range: -40°C~ +130°C
Housing: PBT UL94V-0, Ocean Blue

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.			TITLE: 2.54mm PITCH Housing	
GENERAL TOLERANCE		USE:	PART NO.:	
X.X ±0.30	X. ±5°	CUSTOMER	QA2541Y-204-E3B-P-W	
X.XX ±0.20	X.X ±2°	APPD: J.J.Yao	DWG NO.:	
X.XXX ±0.10	X.XX ±1°	CHKD: X.F.Yan	JKUN-GCKH-1720	
UNITS: mm		DR: Z.M.Xue	SCALE 3 : 1	SHEET 1 / 1